


F-10H 1,400nits

10" FHD High Brightness Field Monitor



With 1400 nits of brightness, the F-10H is the latest 10" monitor in the rugged and reliable F-series.

This 10" Full HD display offers advanced features such as Sharpness and Peaking Boost, enhancing visibility and precision when evaluating light and color.

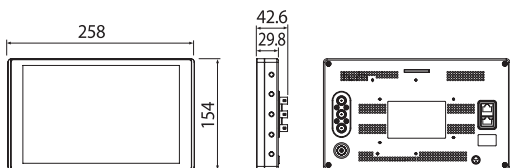

Dimensions

Main Body 258 x 154 x 29.8(mm) / 10.15 x 6.06 x 1.17(inch)

Weight 1.2kg / 2.65lbs

Product Highlights

- 10", Full HD Resolution (1920 x 1200)
- 4K Compatible
- Max Luminance 1400nits
- DCI-P3 Coverage 95%
- Tempered Glass Treatment
- HDR (PQ / HLG / Slog3)
- Camera LUTs (Log-C, C-Log, S-Log1/2/3, Red Gamma3/4)
- Custom 3D-LUT Import
- Sharpness + Peaking Boost
- ARRI Metadata Display
- Scan / Anamorphic Desqueeze / Zoom / Split Zoom
- 3 x 3G SDI (1 x 3G SDI Selectable I/O)
- HDMI ↔ SDI Cross Conversion
- Luma(Y') Zone Check (Zebra / Color)
- H/V Flip, Auto Flip
- Horizontal Meter
- Waveform / Vectorscope
- DC 12V ~ 34V

Optional Accessories



Size	10,1"
Resolution	1920 x 1200 (16:10)
Pixel Pitch	0,1128(H) x 0,1128(V) mm
Color Depth	16.7M Colors (8 bit)
Viewing Angle	170°(H) / 170°(V)
Brightness	1400cd/m2
Contrast Ratio	1100 : 1
Display Area	216.58(H) x 135.36(V) mm

Input	
SDI	1 x 3G-SDI Input 1 x 3G-SDI In/Out Selectable
HDMI	1 x HDMI 2.0 Input
Output	
SDI	1 x 3G-SDI Output (HDMI-to-SDI Conversion Output)
HDMI	1 x HDMI Output (SDI-to-HDMI Conversion Output)

General	
Audio In	Embedded Audio
Audio Out	Analog Stereo (3.5mm Phone Jack)
Power	DC 12V 1.6A
Power Consumption	20 Watts
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)

Dimensions	
Main Body	258.0 x 154.0 x 29.8(mm) 10.15 x 6.06 x 1.17(inch)
Shipping Box	320.0 x 240.0 x 87.0(mm) 12.59 x 9.44 x 3.42(inch)
Weight	1.2kg / 2.65lbs
Basic Accessories	D-Tap Cable Camera Mount
Optional Accessories	DV Battery Bracket V-mount Bracket G-mount Bracket Carrying Case Sun Hood DC Power Adapter

