Zacuto USA

Canon® C80 Cage

The Zacuto C80 Cage is lightweight, compact, and ready to accommodate any shooting style! The cage comes with an HDMI strain relief clamp and right angle HDMI adapter. It has a built in Arca Swiss style wedge plate, compatible with Zacuto's ACT System. This system allows you to quickly transform from handheld run'n'gun shooting, to shoulder-mounted, to gimbal, and more!

The cage screws into the top and bottom of the camera with provided ¼"-20 and 3/8″-16 screws for a rock solid connection. The top of the cage includes numerous ¼"-20 holes for mounting accessories. It also has built-in Z-Rails (NATO) on the top and side for mounting an optional handle or other accessories. It features Canon's anti-twist grooves for mounting the camera's proprietary handle. The bottom plate has three ¼"-20 and one 3/8"-16 mounting holes.
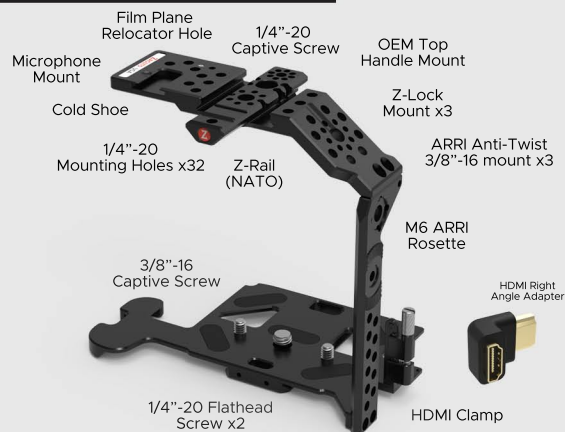
The C80 Cage also features an M6 ARRI rosette on the side for a handgrip, a coldshoe for mounting audio devices or a monitor, multiple ARRI anti-twist 3/8"-16 holes, and the option to relocate the camera's film plane screw. No matter your style, this cage has you covered.

Check out our tutorial videos at zacuto.com

Call us at
312-863-3456

Parts & Features

- Film Plane Relocator Hole
- Microphone Mount
- Cold Shoe
- 1/4"-20 Captive Screw
- OEM Top Handle Mount
- 1/4"-20 Mounting Holes x32
- Z-Rail (NATO)
- Z-Lock Mount x3
- ARRI Anti-Twist 3/8"-16 mount x3
- 3/8"-16 Captive Screw
- M6 ARRI Rosette
- HDMI Right Angle Adapter
- 1/4"-20 Flathead Screw x2
- HDMI Clamp

Optional Accessories

- Rosette Trigger Handgrip
- Tactical Handle
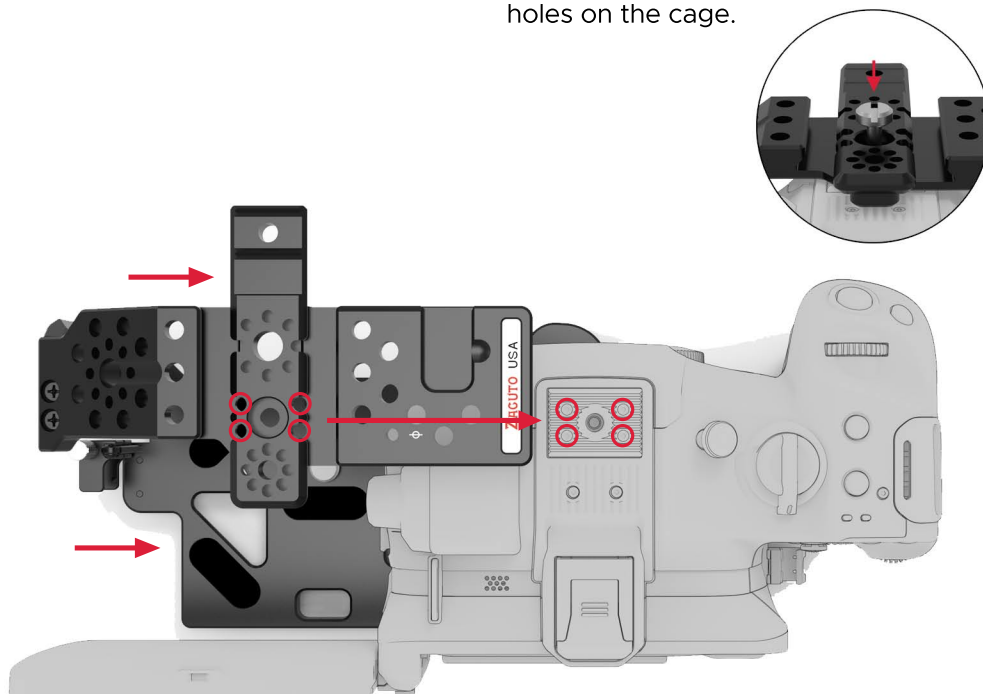- Z-Rail Ball Mount
- Z-Lock

Assembling C80 Cage

Step 1

Remove the HDMI port door and the cage mounting screws from the screw bag before installing the cage.

Step 2

Slide the C80 Cage onto the camera from the side as viewed in the image below. Align the 4 small screw heads and the 1/4"-20 screw hole on the camera top with the 4 top guide holes and 1/4"-20 hole on the cage. You may need to flex open the cage slightly to align the grooves on the camera with the ones on the cage. Simultaneously align the 3/8"-16 and 1/4"-20 holes on the camera bottom with the holes on the cage.

Step 3

With all the holes aligned, insert and tighten down all 4 screws.

HDMI 🔒

right-angle HDMI adapter

1. Align HDMI clamp over camera's HDMI port.
2. Insert HDMI connector and tighten silver thumb screw to secure.