


# Camgear V20S **Payload 25KG** **Bowl 100MM**



## Specifications

|                              |                                      |
|------------------------------|--------------------------------------|
| <b>Model Number</b>          | V20S                                 |
| <b>Maximum Payload</b>       | 25 kg/55.1 lbs                       |
| <b>Counterbalance Range</b>  | 0-24 kg/0-52.9 lbs (at C.O.G 125 mm) |
| <b>Camera Platform Type</b>  | Mini Euro plate (Camgear WP-3)       |
| <b>Sliding Range</b>         | 70 mm/2.75 in                        |
| <b>Camera Plate</b>          | 1/4", 3/8" screw                     |
| <b>Counterbalance System</b> | 10 steps (1-8 & 2 Adjusting levers)  |
| <b>Pan &amp; Tilt Drag</b>   | 8 steps (1-8)                        |
| <b>Pan &amp; Tilt Range</b>  | Pan: 360° / Tilt: +90/-75°           |
| <b>Temperature Range</b>     | -40°C to +60°C / -40 to +140°F       |
| <b>Levelling Bubble</b>      | Illuminated Levelling Bubble         |
| <b>Weight</b>                | 3.2 kg/7.0 lbs                       |
| <b>Bowl Diameter</b>         | 100 mm                               |

- ◆ Real professional drag performance, selectable 8 positions pan & tilt drag including zero position, offer operators silky smooth movement and precise framing.
- ◆ Selectable 10 position counterbalance for ENG cameras. Thanks to newly featured zero position, it can support the lightweight ENG camera as well.
- ◆ With self-illuminating levelling bubble.
- ◆ Ideal for the ENG cameras from XDCAM to P2HD with low or high profile configuration.
- ◆ 100m bowl head, compatible with all 100 mm tripods on the market.
- ◆ Equipped with mini Euro plate quick-release system, which enables faster set-up of camera.

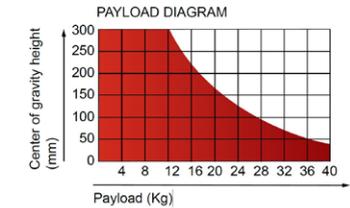

## Camgear V20S **GS CF** **Bowl 100MM**

Tripod System incl. V20S Fluid Head, Carbon Fiber Tripod & Ground Spreader.

SKU: CMG-V20S-GS-CF-TRISYS

### System Configuration

- V20S Fluid Head
- ENG/CF2 2-Stage
- Carbon Fiber Tripod
- PB-1 Pan Bar
- GS-2 Ground Spreader
- Tripod Bag



|                         |                          |
|-------------------------|--------------------------|
| <b>Weight</b>           | 7.75 kg/17.1 lbs         |
| <b>Height Range</b>     | 0.61-1.70 m/24.0-66.9 in |
| <b>Transport Length</b> | 0.88 m/34.6 in           |
| <b>Section</b>          | 2 Stages                 |

## Camgear V20S **GS AL** **Bowl 100MM**

Tripod System incl. V20S Fluid Head, Aluminum Tripod & Ground Spreader.

SKU: CMG-V20S-GS-AL-TRISYS

### System Configuration

- V20S Fluid Head
- ENG/AL2 2-Stage
- Aluminum Tripod
- PB-1 Pan Bar
- GS-2 Ground Spreader
- Tripod Bag



|                         |                          |
|-------------------------|--------------------------|
| <b>Weight</b>           | 8.6 kg/18.9 lbs          |
| <b>Height Range</b>     | 0.61-1.70 m/24.0-66.9 in |
| <b>Transport Length</b> | 0.88 m/34.6 in           |
| <b>Section</b>          | 2 Stages                 |

## Camgear V20S **MS CF** **Bowl 100MM**

Tripod System incl. V20S Fluid Head, Carbon Fiber Tripod & Mid Level Spreader.

SKU: CMG-V20S-MS-CF-TRISYS

### System Configuration

- V20S Fluid Head
- ENG/CF2 2-Stage
- Carbon Fiber Tripod
- PB-1 Pan Bar
- MSP-2 Mid Level Spreader
- RF-1 Rubber Feet (x3)
- Tripod Bag



|                         |                          |
|-------------------------|--------------------------|
| <b>Weight</b>           | 8.19 kg/18.1 lbs         |
| <b>Height Range</b>     | 0.69-1.66 m/27.2-65.4 in |
| <b>Transport Length</b> | 0.88 m/34.6 in           |
| <b>Section</b>          | 2 Stages                 |

## Camgear V20S **MS AL** **Bowl 100MM**

Tripod System incl. V20S Fluid Head, Aluminum Tripod & Mid Level Spreader.

SKU: CMG-V20S-MS-AL-TRISYS

### System Configuration

- V20S Fluid Head
- ENG/AL2 2-Stage
- Aluminum Tripod
- PB-1 Pan Bar
- MSP-2 Mid Level Spreader
- RF-1 Rubber Feet (x3)
- Tripod Bag



|                         |                          |
|-------------------------|--------------------------|
| <b>Weight</b>           | 9.04 kg/19.9 lbs         |
| <b>Height Range</b>     | 0.69-1.66 m/27.2-65.4 in |
| <b>Transport Length</b> | 0.88 m/34.6 in           |
| <b>Section</b>          | 2 Stages                 |