




Canon® C400 Cage

The Canon C400 cage includes a top plate and two side rails that mount to the VCT Pro. The side rails are optional and not required to use with the top plate.

The Top Plate has a built in Z-Rail to mount the Tactical Handle. The cage design maintains access to the hotshoe on the top rear of the camera for audio devices. It also has tapped holes to relocate Canon's mic shock mount to the side of the cage. The cage has several bi-directional Z-Rail, integrated cold shoe slots in the rear, numerous anti rotation 1/4-20 and 3/8-16 tapped holes, and removable top 15mm rod clamps. The side rails are Z-Rail with Arri M6 style rosettes, anti rotation 1/4-20 and 3/8-16 tapped holes.


Parts & Features

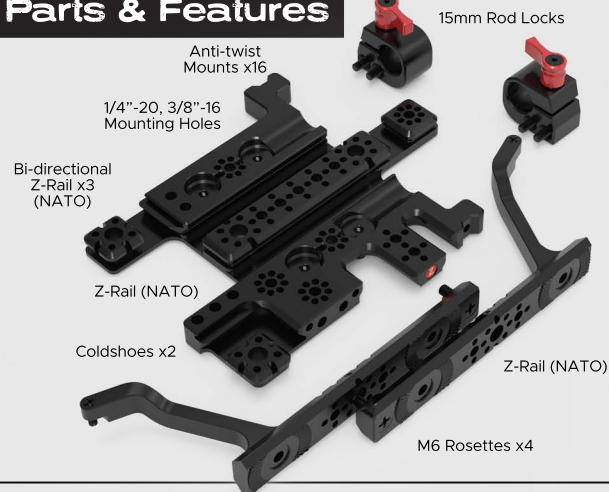

Optional Accessories



Assembling Canon C400 Cage

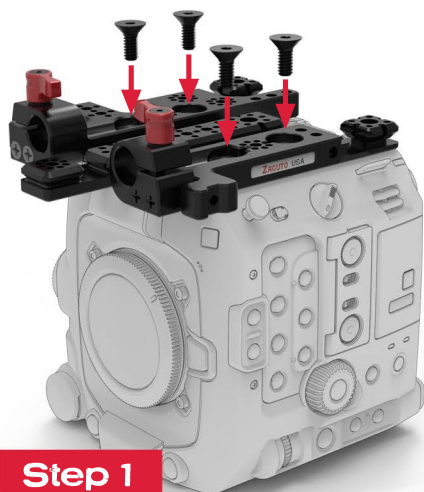


Step 1

Place Top Plate on camera and secure with 4 included screws.



Step 2

If purchased, attach Side Rails to Top Plate.

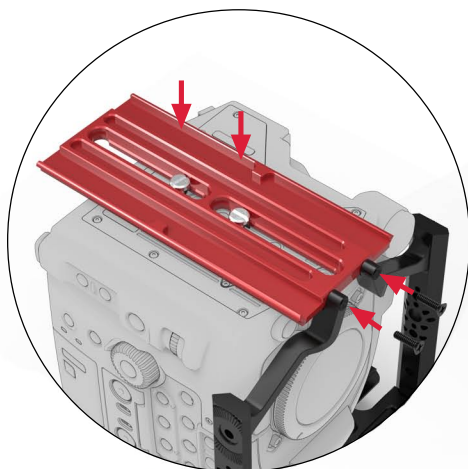

Step 3

Flip camera over and loosely attach VCT Red Plate to bottom of camera. Slide Red Plate flush with front edge of camera as shown, and tighten Red Plate.



Check out our tutorial videos at zacuto.com

Call us at
312-863-3456