
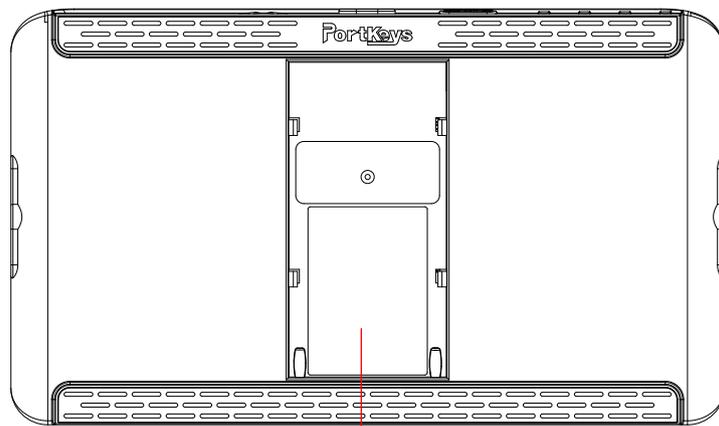


1000nits 7 INCH WIRED CAMERA CONTROL MONITOR

Basic Parameters		Interface	
Screen Size	7"	Video Input/Output	Input Interface: 4K30p HDMI
Color Gamut	Rec.709		Output Interface: 1080p60 HDMI
Color Depth	10bit(8+2 FRC)	Support Battery Model	SONY NP-F970/F960/F750/F550
Resolution	1920x1080	Power Input	7~24V
Dimension	176.2x103.8x18.4mm	USB-A	Upgrade Firmware / Load 3D LUT
Viewing Angle	85 /85 /85 /85	Audio Output	3.5mm Headphone Jack
Brightness	1000nits	HDMI Output Function	3D LUT Output
Contrast Ratio	1000:1		Anamorphic Lens Calibration Output
Weight	245g		UI Output
Material	PC+ABS		Image Brightness, Tone, Contrast Adjustment
Input Voltage	DC 7~24V		Output
Maximum Power	8W		Vertical Shooting Stretches Legs Output
Fan	Quiet		
Menu Language	English / Simplified Chinese / Italian / Japanese / Russian / French / Spanish	HDMI Input Signal	
Operating System	MOVNORM OS	4096 × 2160p@24Hz	
		3840 × 2160p@23.97Hz,24Hz,25Hz,29.97Hz,30Hz	
		1920 × 1080p@23.97Hz,24Hz,25Hz,29.97Hz,30Hz,50Hz,59.94Hz,60Hz	
		1920 × 1080psf@23.97Hz,24Hz,25Hz,29.97Hz,30Hz	
Peaking	Zebra	1920 × 1080i@50Hz,59.94Hz,60Hz	
False Color	Luma Histogram	1280 × 720p@50Hz,59.94Hz,60Hz	
RGB Waveform	Luma Waveform	720 × 576p@50Hz	
Audio Meters	Image Overlay	720 × 576i@50Hz	
Image Capture	Rectangle Crop	720 × 480p@50Hz,59.94Hz,60Hz	
HDR(HLG)	Cross Hair	720 × 480i@50Hz,59.94Hz,60Hz	
Guides	Anamorphic		
Grids	Vertical Extension		
3D LUT	Screen Off	HDMI Output Signal	
Camera Recording	Contrast	1920 × 1080p60	
Brightness	Check Field		
Chroma	Color Temperature		
Tint	Black Level		
Display Flip	V Flip		
H Flip	Live Mode		
Gesture Zoom			

Product Specification

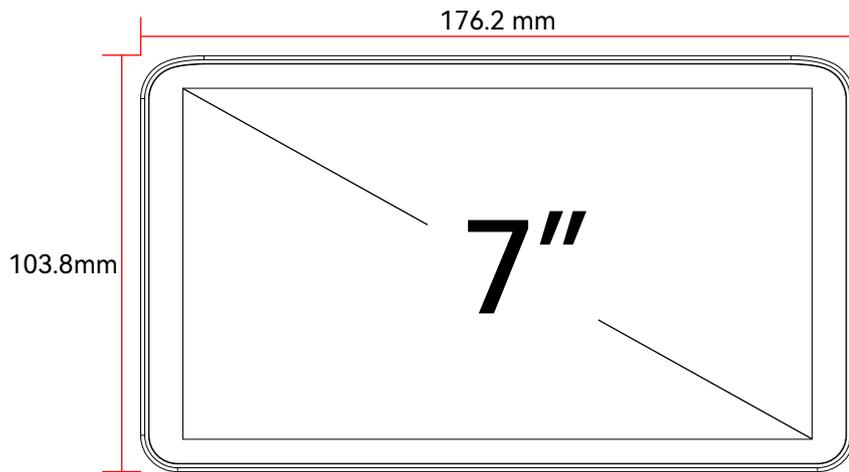

NP-F Battery Plate

Battery Lock

